




Mid F900 Motherboard Replacement

Replace your motherboard to restore functionality to your Mid F900 tablet.

Written By: Matthew Oliva

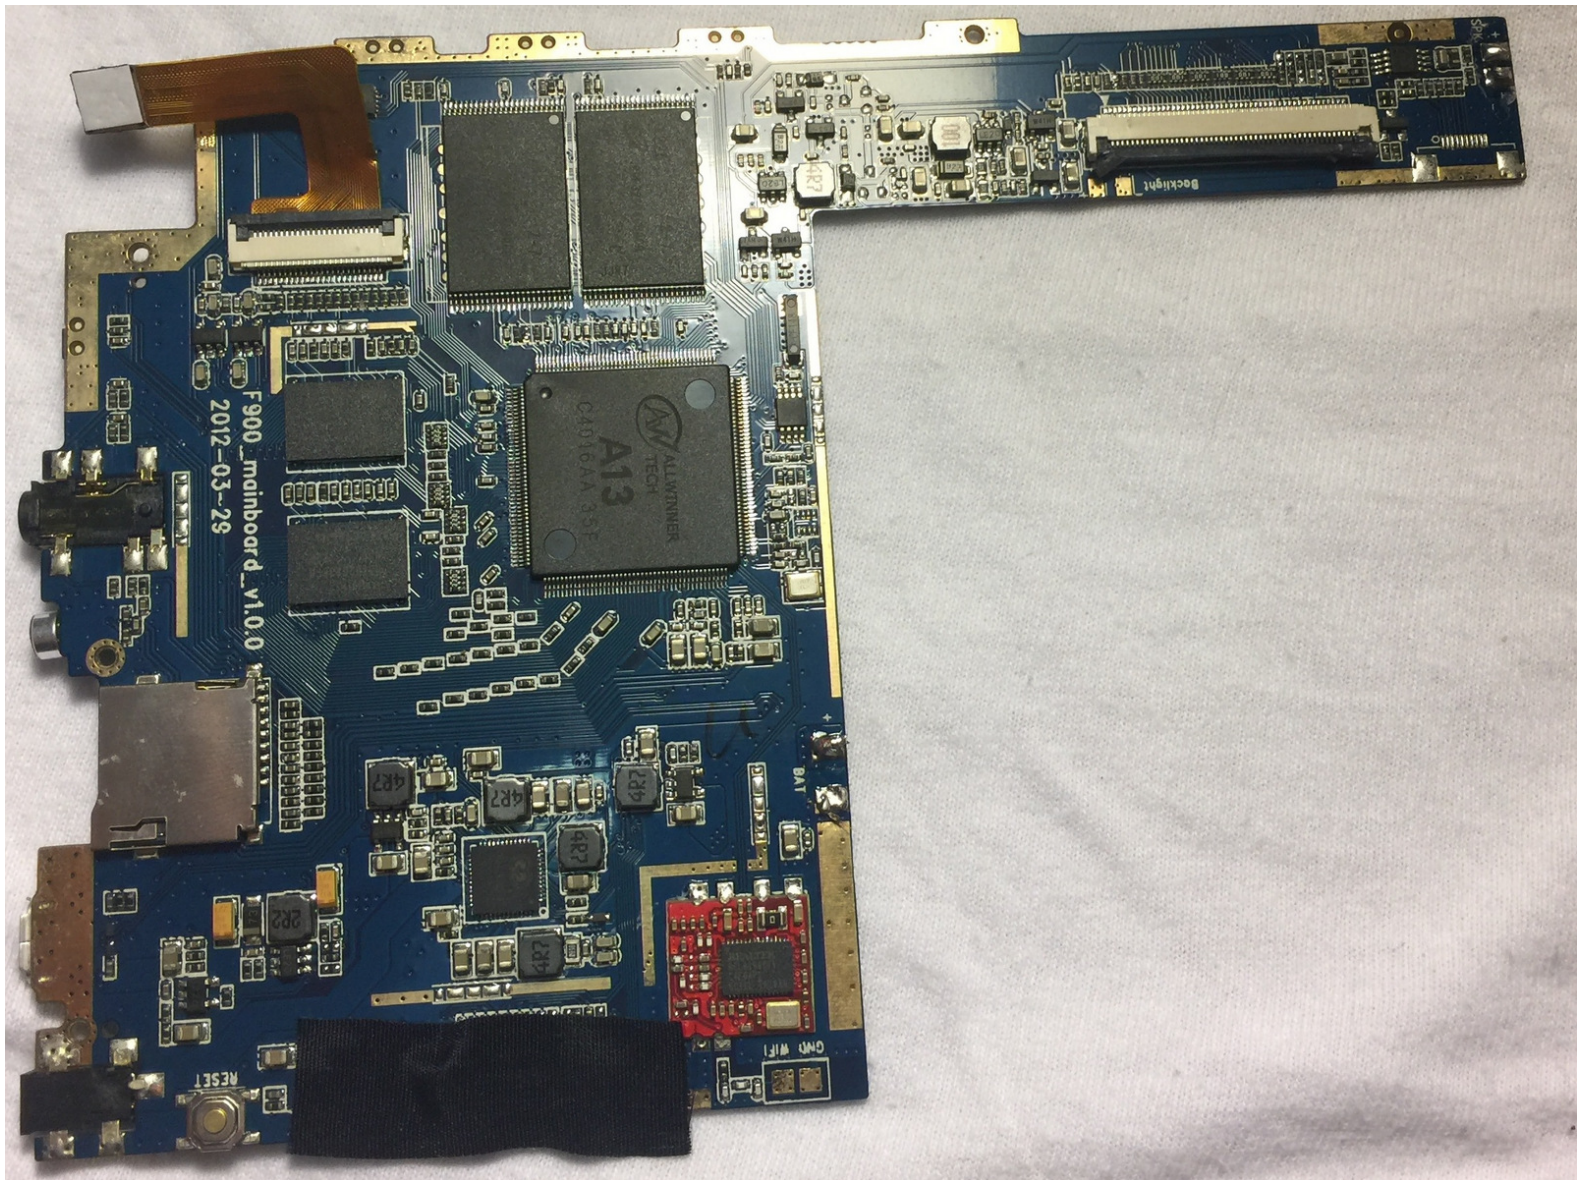

INTRODUCTION

This is a guide to replace the motherboard in the device. Make sure to follow all the steps correctly and handle with care.



TOOLS:


- [JIS Driver Set](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Back Cover





- Using a J00 Phillips-head screwdriver, remove the two screws located at the bottom of the device.
- ⓘ Screws are 5mm x 1mm in size.

Step 2

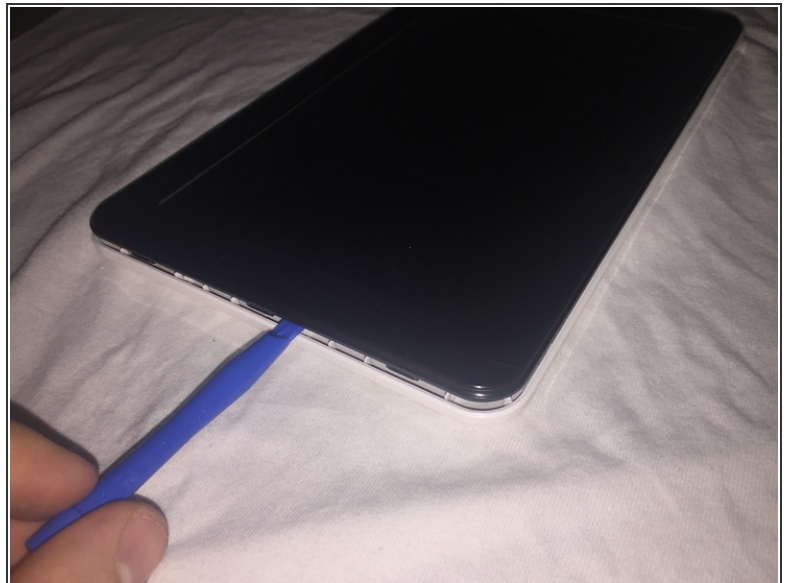

- Use the plastic opening tool to pry off the white back-plate of the device.

Step 3 — Motherboard

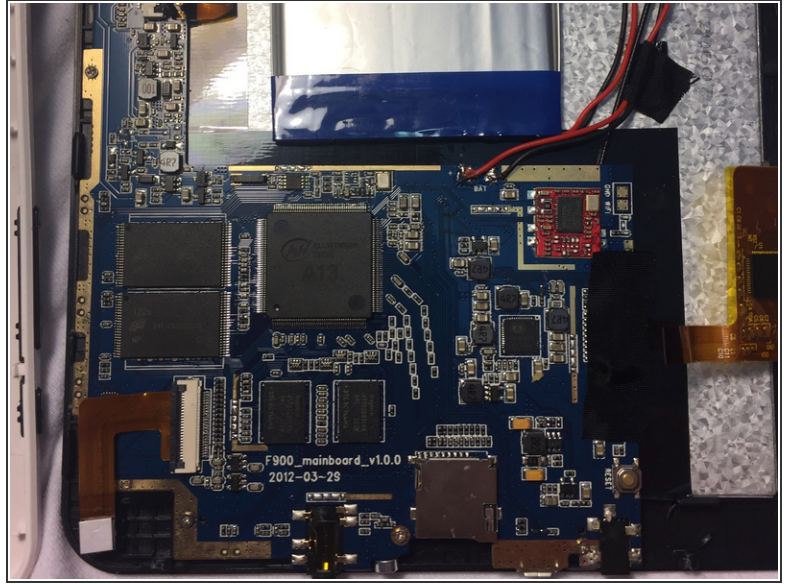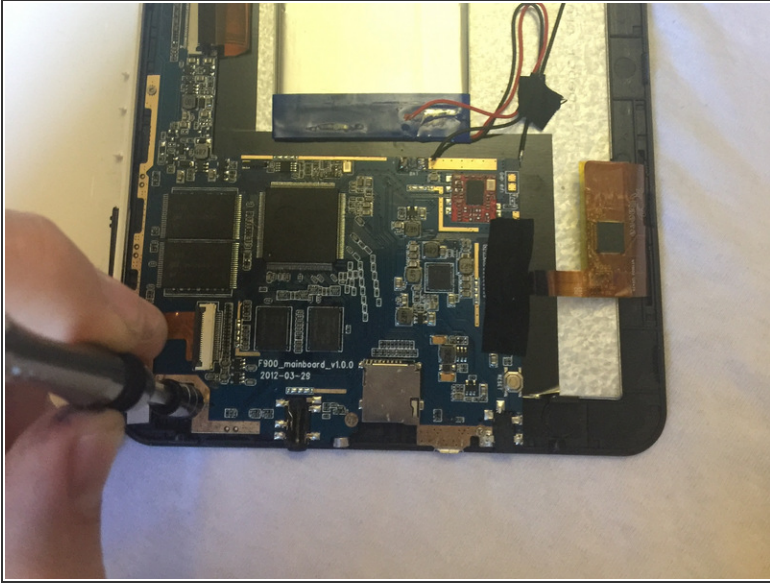

- Using a +00 Phillips head screwdriver, remove the screws securing the motherboard to the device housing.



ⓘ Screws are 4mm x 1mm in size.

Step 4



- Desolder the two black and red wires connected to the motherboard.
- Unclip and remove the ribbon cables attached to the motherboard.
- ❗ For soldering help, use the [How to Solder and Desolder Connections](#) guide.

Step 5

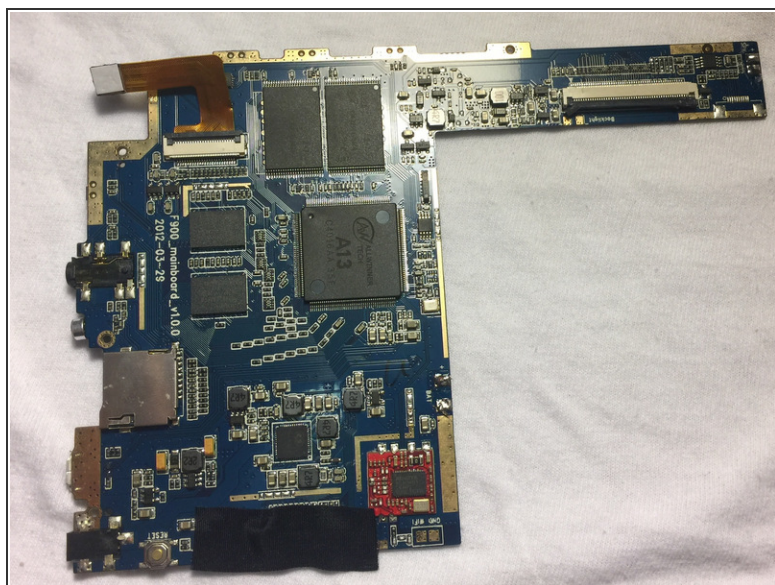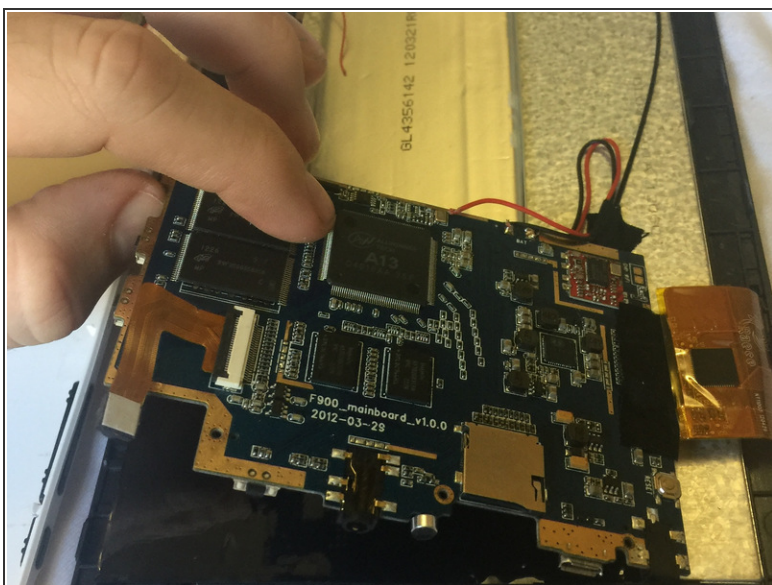

- Carefully lift and remove the motherboard from the device housing.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 01:38:21 AM.